



## Super Fast Recovery Rectifiers

Reverse Voltage 50 to 600 Volts Forward Current 4.0 Amperes



### Features

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability
- Easily cleaned with alcohol, Isopropanol and similar solvents

### Mechanical Data

- Case : Molded plastic DO-201AD
- Epoxy : UL 94V-O rate flame retardant
- Terminals : Axial leads, solderable per MIL-STD-202, method 208 guaranteed
- Polarity : Color band denotes cathode end
- High temperature soldering guaranteed : 260°C/10 seconds
- /0.375", (9.5mm) lead lengths at 5lbs.,(2.3kg) tension
- Weight : 1.1grams

### Marking

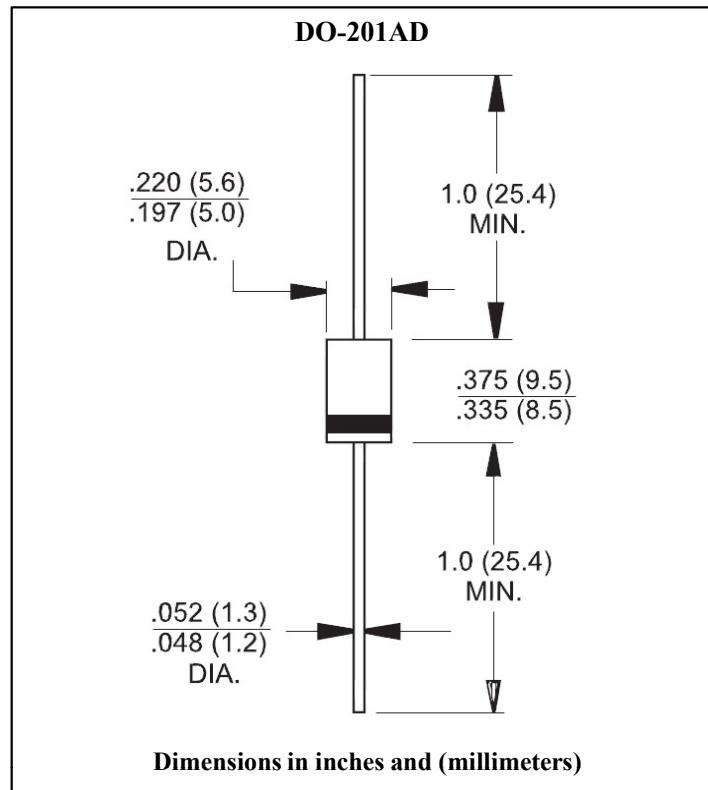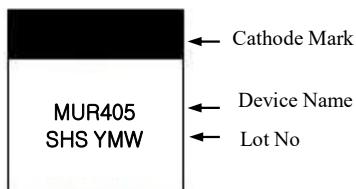

### Maximum Ratings & Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified

Single phase half wave 60 Hz, resistive or inductive load

For capacitive load, derate current by 20%

Parameter	Symbol	MUR 405	MUR 410	MUR 415	MUR 420	MUR 430	MUR 440	MUR 450	MUR 460	Unit	Remark				
Maximum Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	50	100	150	200	300	400	500	600	V					
Maximum RMS Voltage	V <sub>RMS</sub>	35	70	105	140	210	280	350	420	V					
Maximum DC Blocking Voltage	V <sub>DC</sub>	50	100	150	200	300	400	500	600	V					
Maximum Average Forward Rectified Current	I <sub>F(AV)</sub>	4.0								A					
Peak Forward Surge Current 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC Method)	I <sub>FSM</sub>	125								A					
Maximum Instantaneous Forward Voltage @ 4.0A	V <sub>F</sub>	0.89				1.3				V					
Maximum DC Reverse Current at Rated DC Blocking Voltage	I <sub>R</sub>	10								uA	Ta=25°C				
		100								uA	Ta=100°C				
Maximum Reverse Recovery Time	t <sub>rr</sub>	25				50				ns	Note 1				
Typical Junction Capacitance	C <sub>J</sub>	95								pF	Note 2				
Typical Thermal Resistance	R <sub>th(j-a)</sub>	20								°C/W	Note 3				
Operation Junction and Storage Temperature Range	T <sub>j</sub> , T <sub>STG</sub>	-55 to +150								°C					

Note 1. Reverse Recovery Time Test Conditions : I<sub>F</sub>=0.5A, I<sub>R</sub>=1.0A, I<sub>RR</sub>=0.25A.


Note 2. Measured at 1MHz and Applied Reverse Voltage of 4.0Volts D.C.

Note 3. Thermal resistance from junction to ambient




**Ratings and Characteristics Curves** ( $T_a=25^\circ\text{C}$  unless otherwise noted)


**Fig.1 Forward Current Derating Curve**

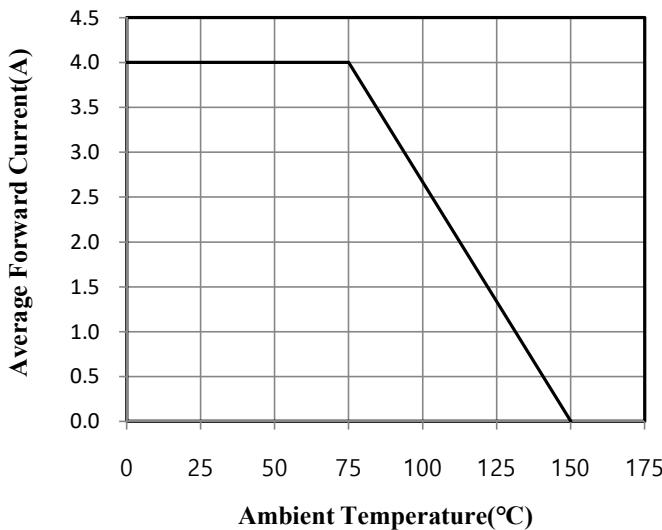


**Fig.2 Maximum Non-Repetitive Peak Forward Surge Current**

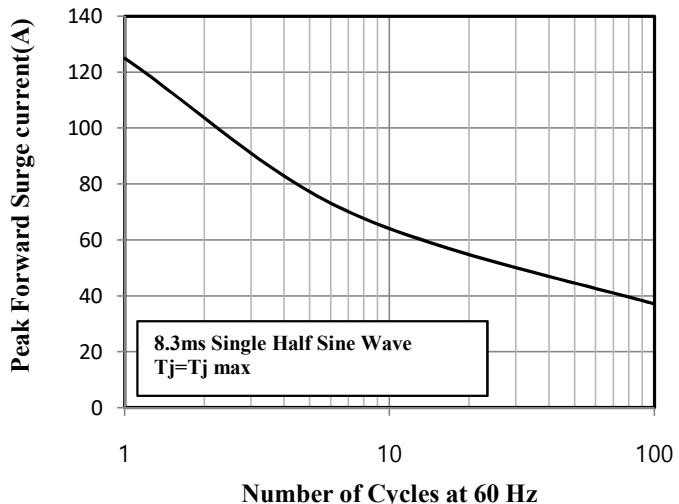


**Fig.3 Typical Instantaneous Forward Characteristics**

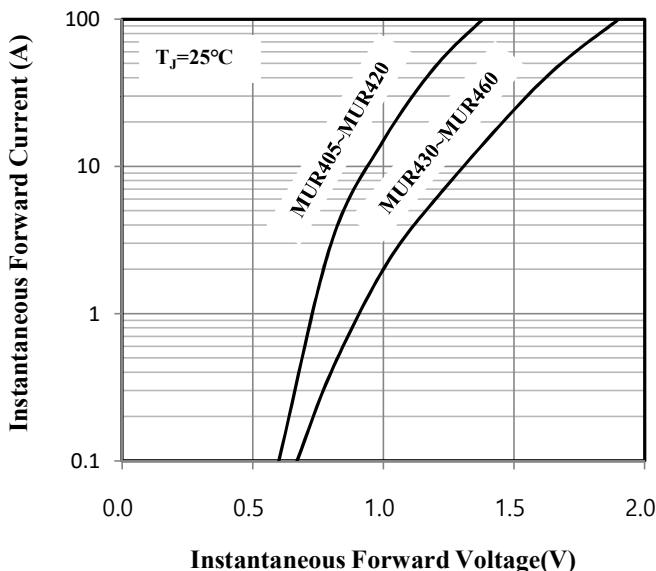

**Fig.5 Typical Reverse Characteristics**

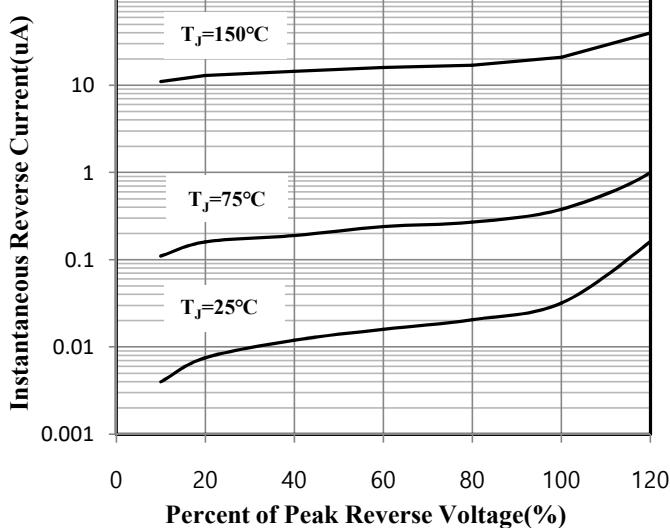

**Fig.4 Typical Junction Capacitance**

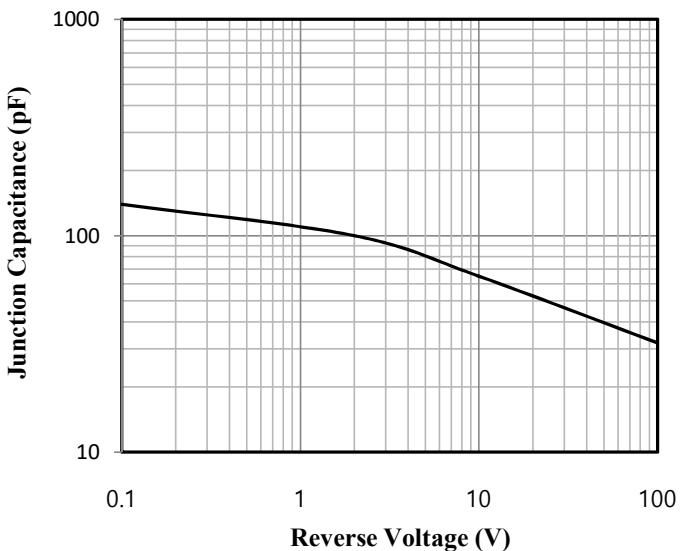

**Fig. 6 Reverse Recovery Time Charateristic and Test Circuit Diagram**

