



**Small Surface Mount Fast Recovery Rectifiers**  
**Reverse Voltage 100 to 1000 Volts, Forward Current 1.0 Ampere**



**Features**

- For surface mounted applications
- Low profile package
- Ideal for automated placement
- Glass passivated chip junction
- High temperature soldering : 260°C / 10 seconds at terminals
- Lead free in comply with EU RoHS 2002/95/EC directives.
- Green molding compound as per IEC61249 Std..(Halogen Free)

**Mechanical Data**

- Case : JEDEC SOD-123FL, Molded plastic over passivated junction
- Terminals : Solderable per MIL-STD-750, Method 2026
- Standard Packaging : 8mm tape (EIA-481)
- Polarity : Color band denotes cathode end
- Weight : 0.0168 grams (Approx.)

**Marking**

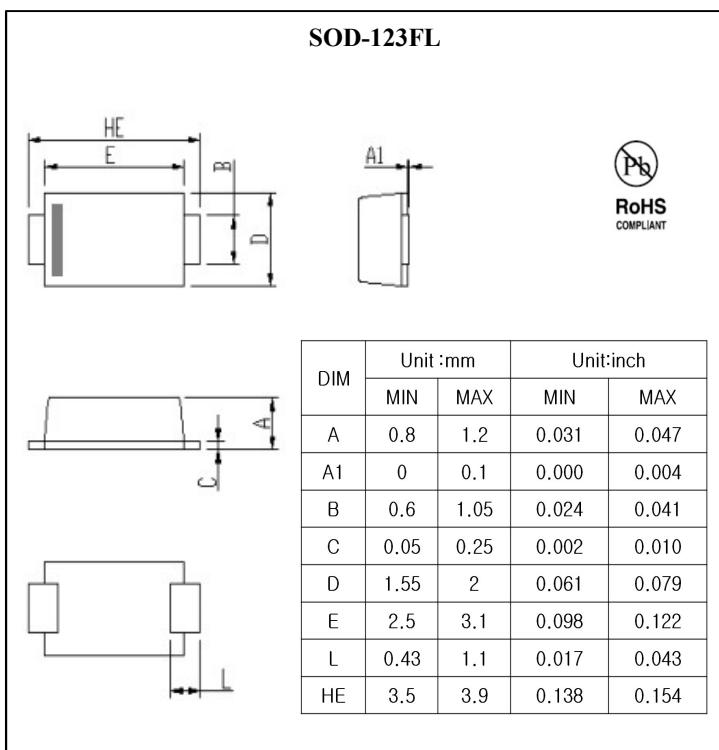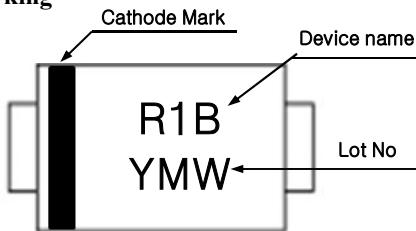

**Maximum Ratings & Electrical Characteristics**

Ratings at 25°C ambient temperature unless otherwise specified  
Single phase half wave 60 HZ, resistive or inductive load  
For capacitive load, derate current by 20%

Parameter	Symbol	RS 1001FL	RS 1002FL	RS 1004FL	RS 1006FL	RS 1008FL	RS 1010FL	Unit	Remark			
Marking Code		R1B	R1D	R1G	R1J	R1K	R1M					
Maximum Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	100	200	400	600	800	1000	V				
Maximum RMS Voltage	V <sub>RMS</sub>	70	140	280	420	560	700	V				
Maximum DC Blocking Voltage	V <sub>DC</sub>	100	200	400	600	800	1000	V				
Maximum Average Forward Rectified Current	I <sub>F(AV)</sub>	1.0						A				
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC Method)	I <sub>FSM</sub>	30						A				
Maximum Instantaneous Forward Voltage (@IF=1A)	V <sub>F</sub>	1.15						V				
Maximum DC Reverse Current at Rated DC Blocking Voltage	I <sub>R</sub>	1.0						uA	T <sub>a</sub> =25°C			
		50						uA	T <sub>a</sub> =125°C			
Typical Junction Capacitance	C <sub>J</sub>	9						pF	Note 1			
Reverse Recovery Time	trr	150		250	500			ns	Note 2			
Typical Thermal Resistance	R <sub>th(j-a)</sub>	180						°C /W	Note 3			
Operation Junction Temperature Range	T <sub>J</sub>	-55 to +150						°C				
Storage Temperature Range	T <sub>STG</sub>	-55 to +150						°C				

Note 1. Measured at 1MHz and Applied Reverse Voltage of 4.0Volts D.C.

Note 2. Reverse Recovery Test Conditions : I<sub>F</sub>=0.5A, I<sub>R</sub>=1.0A, I<sub>RR</sub>=0.25A

Note 3. Thermal resistance from junction to ambient.



Ratings and Characteristics Curves (Ta=25°C unless otherwise noted)

Fig.1 Forward Current Derating Curve

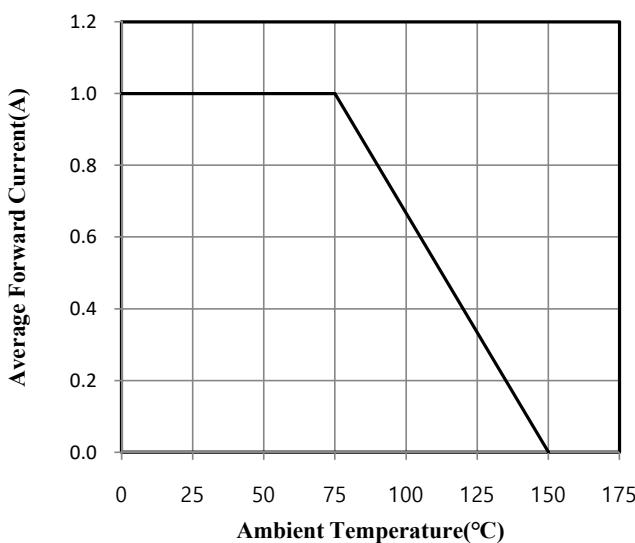


Fig.2 Maximum Non-Repetitive Peak Forward Surge Current

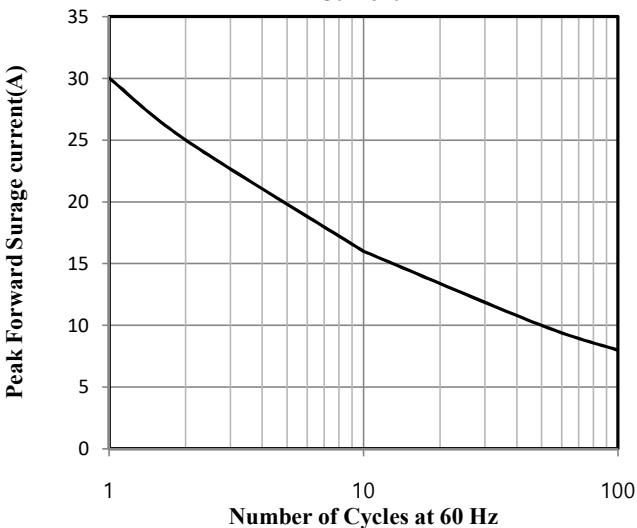


Fig.3 Typical Instantaneous Forward Characteristics

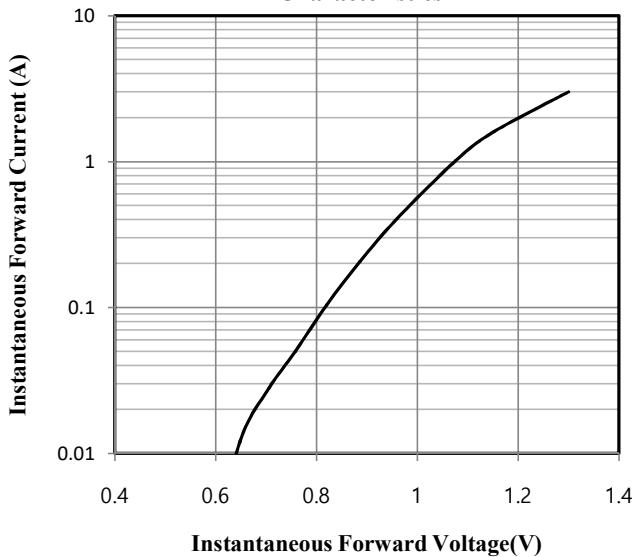


Fig.4 Typical Junction Capacitance

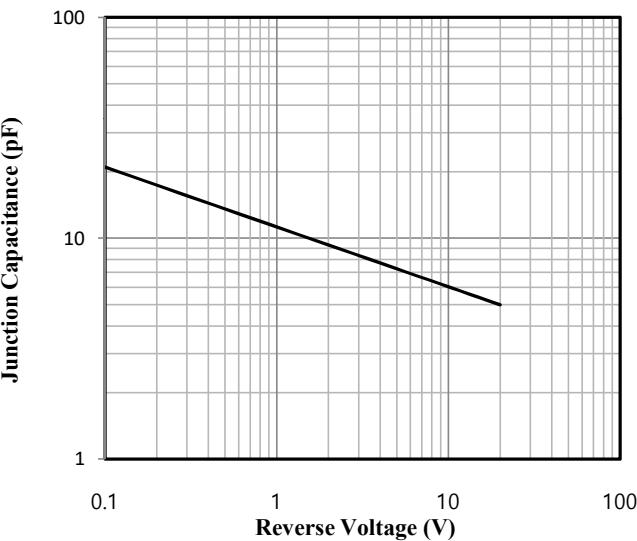


Fig.5 Typical Reverse Characteristics

