



Low VF Dual Schottky Barrier Rectifier Reverse Voltage 200 Volts Forward Current 20 Amperes

Features


- High current capability, low forward voltage.
- Excellent high temperature stability
- Low power loss, and high efficiency
- High forward surge capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications.
- RoHS compliant

Mecanical Data

- Case :JEDEC ITO-220AB molded plastic package
- Termals: Matte tin plated,solderable per MIL-STD-750, Method 2026
- Molding Compound Flammability Rating:UL94-0
- Polarity:As marked
- Mounting position : Any
- Weight : 2.24 g approx.

Application

- Switching mode power supply applications
- Portable equipment battery applications
- High frequency rectification
- DC/DC converter

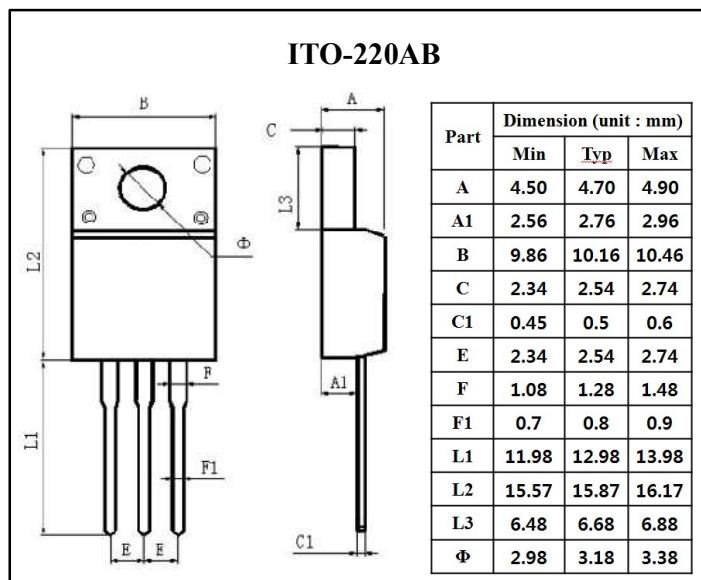

Maximum Ratings

Parameter	Symbol	Rating	Unit
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	200	V
Maximum RMS Voltage	V _{RMS}	140	V
Maximum DC Blocking Voltage	V _{DC}	200	V
Maximum Average Forward Rectified Current at Total Device	I _{F(AV)}	20	A
Maximum Average Forward Rectified Current at Per Leg		10	A
Peak Forward Surge Current,8.3ms single half sine-wave	I _{FSM}	230	A
Operating Junction Temperature Range	T _J	-65 to +150	°C
Storage Temperature Range	T _{STG}	-65 to +150	°C

Electrical Characteristics (Ta=25°C unless otherwise noted)

Characteristic	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Reverse Breakdown Voltage	V _R	200	-	-	V	I _R =0.2mA
Forward Voltage Drop	V _F	-	0.48	-	V	I _F =0.1A at Ta=25 °C
		-	0.86	0.89	V	I _F =10A at Ta=25 °C
Reverse Leakage Current	I _R	-	2.0	200	uA	V _R =200V, Ta=25 °C
		-	5.0	-	mA	V _R =200V, Ta=125 °C



Ratings and Characteristics Curves (Ta=25°C unless otherwise noted)

Fig.1 Forward Current Derating Curve

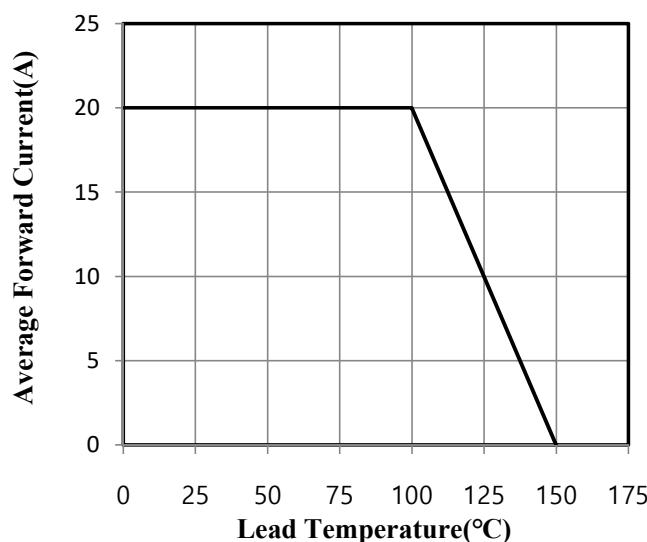


Fig.2 Maximum Non-Repetitive Peak Forward Surge Current

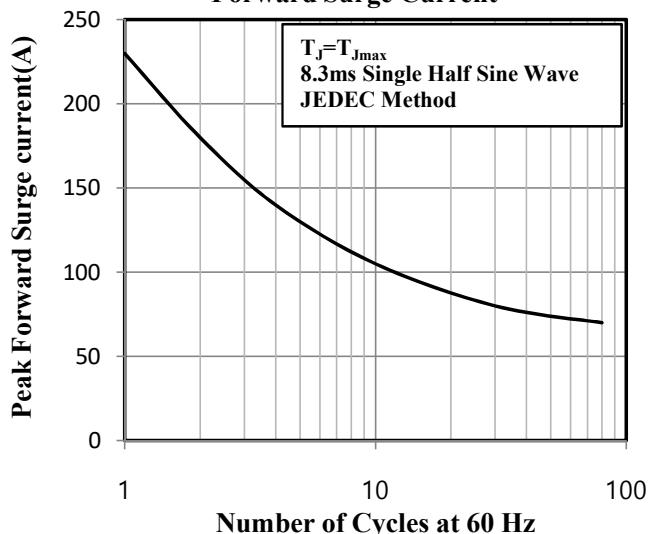


Fig.3 Typical Instantaneous Forward Characteristics

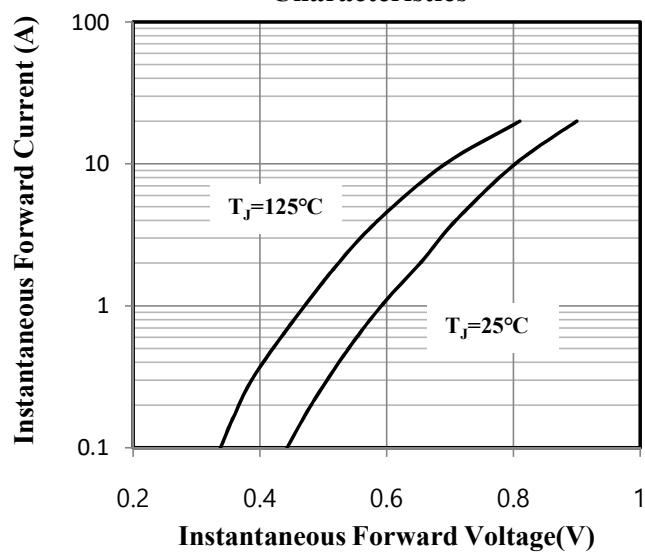


Fig.4 Typical Junction Capacitance

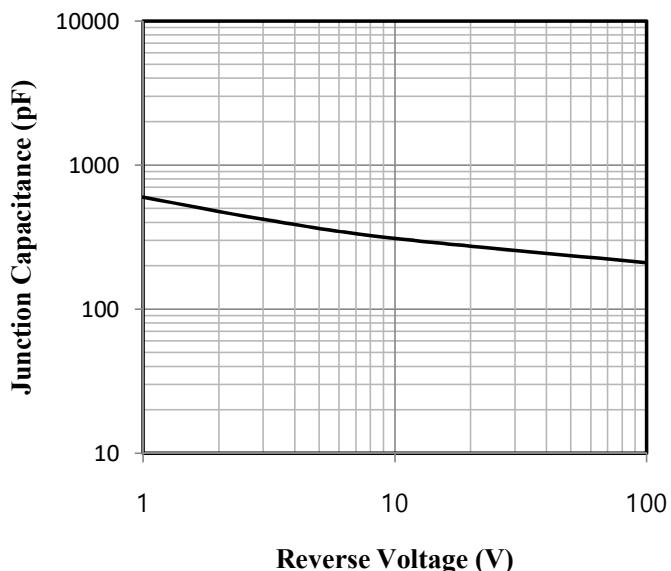


Fig.5 Typical Reverse Characteristics

