



Glass Passivated Super Fast Rectifiers

Reverse Voltage 50 to 1000 Volts Forward Current 16.0 Amperes



Features

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability

Mechanical Data

- Case : ITO-220AC Molded plastic
- Epoxy : UL 94V-O rate flame retardant
- Lead : Leads solderable per MIL-STD-202,
method 208 guaranteed
- Polarity : As marked
- High temperature soldering guaranteed : 260°C/10 seconds
/0.25",(6.35mm) from case
- Weight : 2.24 grams
- Mounting torque : 5 in-lbs. max.

Marking

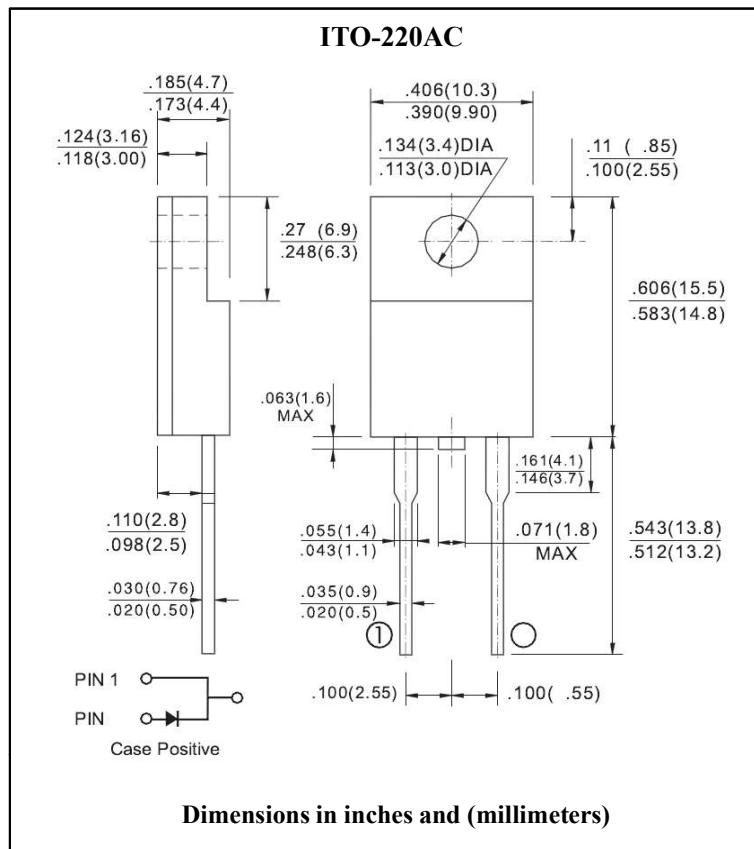

Maximum Ratings & Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified

Single phase half wave 60 Hz, resistive or inductive load

For capacitive load, derate current by 20%

| Parameter | Symbol | HERAF 1601G | HERAF 1602G | HERAF 1603G | HERAF 1604G | HERAF 1605G | HERAF 1606G | HERAF 1607G | HERAF 1608G | Unit | Remark |
|--|----------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------|----------|
| Maximum Repetitive Peak Reverse Voltage | V _{RRM} | 50 | 100 | 200 | 300 | 400 | 600 | 800 | 1000 | V | |
| Maximum RMS Voltage | V _{RMS} | 35 | 70 | 140 | 210 | 280 | 420 | 560 | 700 | V | |
| Maximum DC Blocking Voltage | V _{DC} | 50 | 100 | 200 | 300 | 400 | 600 | 800 | 1000 | V | |
| Maximum Average Forward Rectified Current | I _{F(AV)} | | | | | | 16 | | | A | |
| Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC Method) | I _{FSM} | | | | | | 250 | | | A | |
| Maximum Instantaneous Forward Voltage @ 16A | V _F | | 1.0 | | 1.3 | | 1.7 | | | V | |
| Maximum DC Reverse Current at Rated DC Blocking Voltage | I _R | | | | 10 | | | | | uA | Ta=25°C |
| | | | | | 400 | | | | | uA | Ta=125°C |
| Maximum Reverse Recovery Time | t _{rr} | | 50 | | | 80 | | | | ns | Note 1 |
| Typical Junction Capacitance | C _J | | 150 | | | 110 | | | | pF | Note 2 |
| Typical Thermal Resistance | R _{th(j-c)} | | | | 2.0 | | | | | °C /W | Note 3 |
| Operation Junction Temperature Range | T _J | | | | -65 to +150 | | | | | °C | |
| Storage Temperature Range | T _{STG} | | | | -65 to +150 | | | | | °C | |

Note 1. Reverse Recovery Test Conditions : I_F=0.5A, I_R=1.0A, I_{RR}=0.25A

Note 2. Measured at 1MHz and Applied Reverse Voltage of 4.0Volts D.C.

Note 3. Mount on Heatsink Size of 2in × 3in × 0.25 in Al-Plate.



Ratings and Characteristics Curves (Ta=25°C unless otherwise noted)

Fig.1 Forward Current Derating Curve

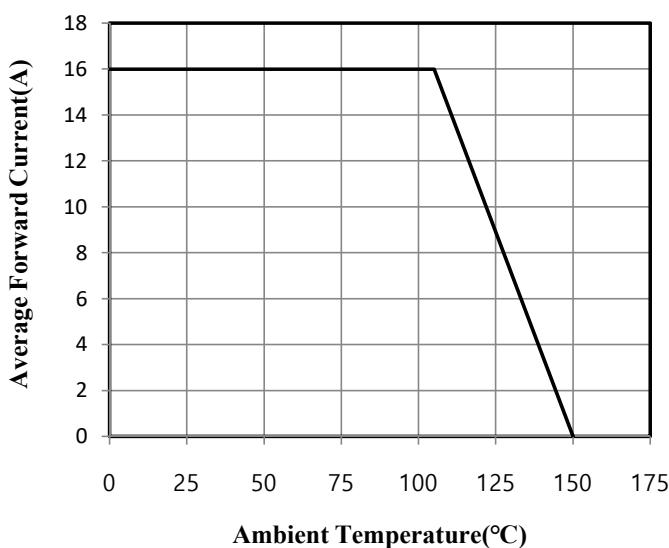


Fig.3 Typical Instantaneous Forward Characteristics

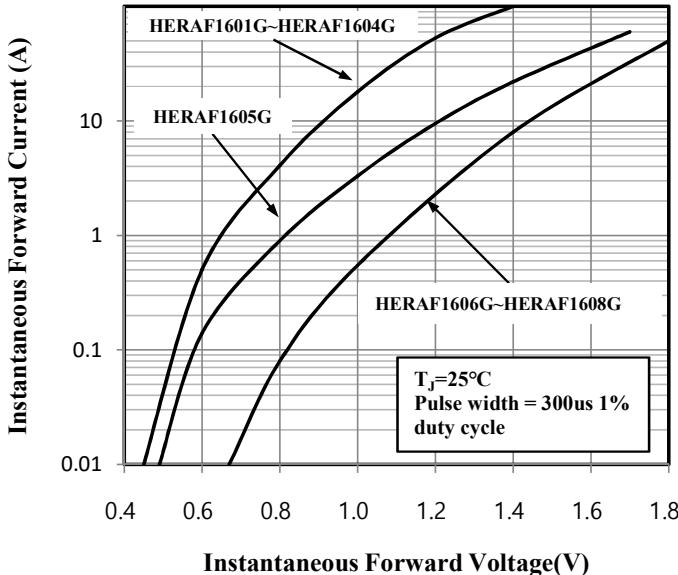


Fig.5 Typical Reverse Characteristics

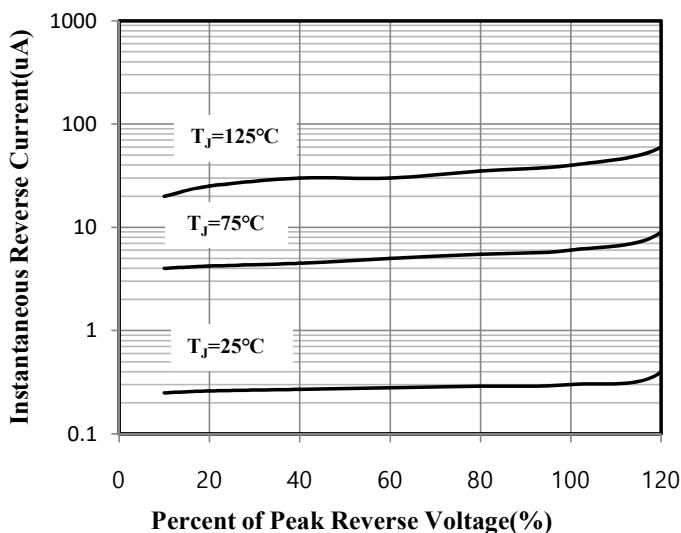


Fig.2 Maximum Non-Repetitive Peak Forward Surge Current

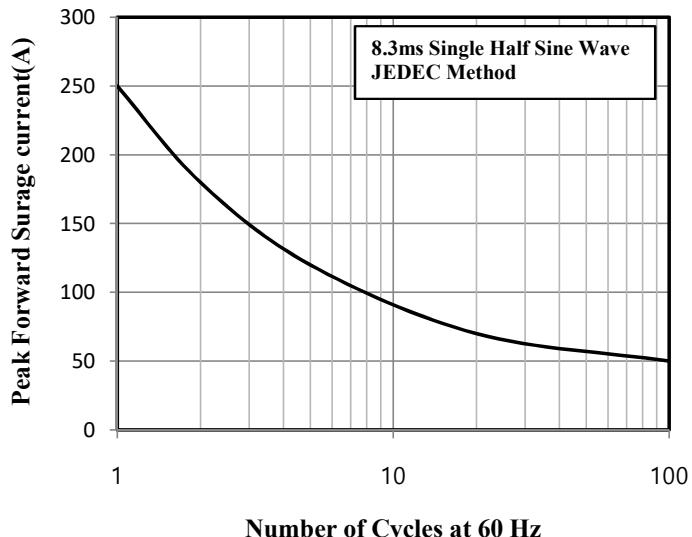


Fig.4 Typical Junction Capacitance

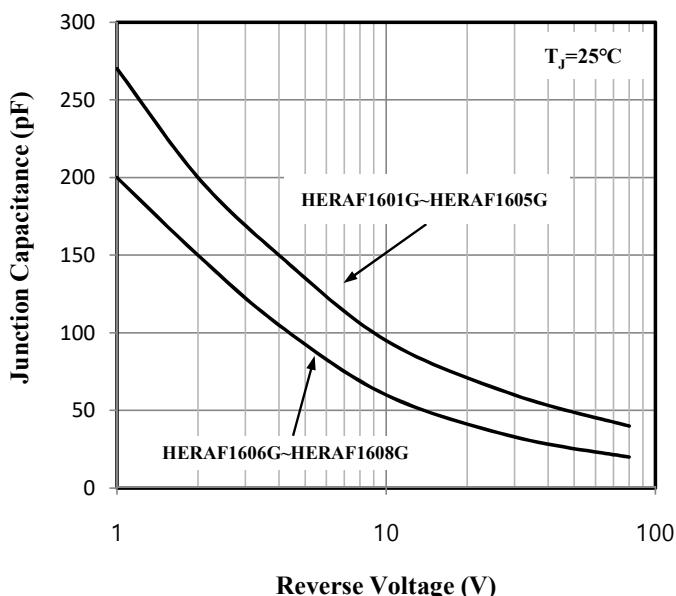


Fig.6 Reverse Recovery Time Charateristic and Test Circuit Diagram

