



## High Efficient Rectifiers

Reverse Voltage 50 to 1000 Volts Forward Current 1.5 Amperes



### Features

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability

### Mechanical Data

- Case : Molded plastic DO-15
- Epoxy : UL 94V-O rate flame retardant
- Lead : Axial leads, solderable per MIL-STD-202, Method 208 guaranteed
- Polarity : Color band denotes cathode end
- High temperature soldering guaranteed : 260°C/10 seconds/0.375",(9.5mm) lead lengths at 5 lbs.,(2.3kg) tension
- Mounting position : Any
- Weight : 0.40 grams

### Marking

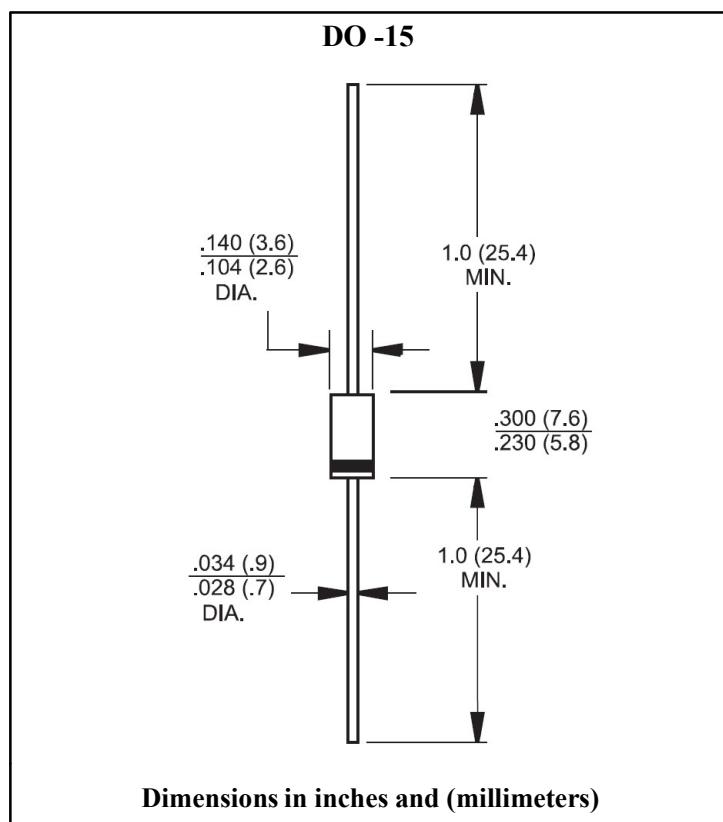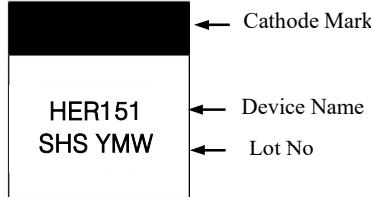

### Maximum Ratings & Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified

Single phase half wave 60 Hz, resistive or inductive load

For capacitive load, derate current by 20%

Parameter	Symbol	HER 151	HER 152	HER 153	HER 154	HER 155	HER 156	HER 157	HER 158	Unit	Remark				
Maximum Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	300	400	600	800	1000	V					
Maximum RMS Voltage	V <sub>RMS</sub>	35	70	140	210	280	420	560	700	V					
Maximum DC Blocking Voltage	V <sub>DC</sub>	50	100	200	300	400	600	800	1000	V					
Maximum Average Forward Rectified Current 0.375"(9.5mm) Lead Length	I <sub>(AV)</sub>	1.5								A					
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I <sub>FSM</sub>	50								A					
Maximum Instantaneous Forward Voltage	V <sub>F</sub>	1.0			1.3		1.7		V	I <sub>F</sub> =1.5A					
Maximum DC Reverse Current at Rated DC Blocking Voltage	I <sub>R</sub>	5.0						150		uA	T <sub>a</sub> =25°C				
Maximum Reverse Recovery Time	trr	50									T <sub>a</sub> =125°C				
Typical Junction Capacitance	C <sub>J</sub>	50			30		75		pF	Note 2					
Typical Thermal Resistance	R <sub>th(j-a)</sub>	60								°C/W	Note 3				
Operation Junction Temperature Range	T <sub>J</sub>	-55 to +125								°C					
Storage Temperature Range	T <sub>STG</sub>	-55 to +150								°C					

Note 1. Reverse Recovery Time Test Conditions : I<sub>F</sub>=0.5A, I<sub>R</sub>=1.0A, I<sub>RR</sub>=0.25A


Note 2. Measured at 1MHz and Applied Reverse Voltage of 4.0Volts D.C.

Note 3. Mount on Cu-Pad Size 5mm × 5mm on P.C.B




**Ratings and Characteristics Curves** ( $T_a=25^\circ\text{C}$  unless otherwise noted)


**Fig.1 Forward Current Derating Curve**

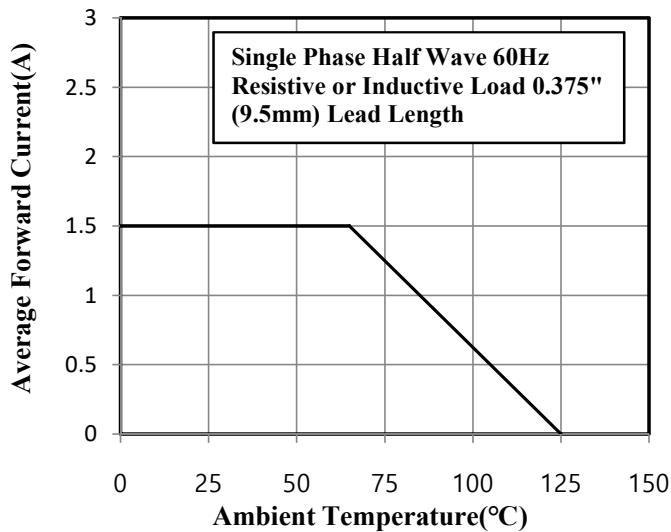


**Fig.3 Typical Instantaneous Forward Characteristics**

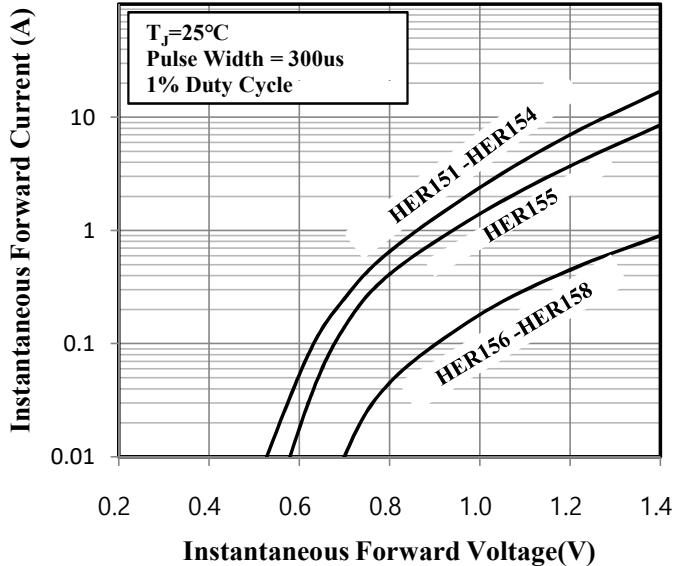


**Fig.5 Typical Reverse Characteristics**

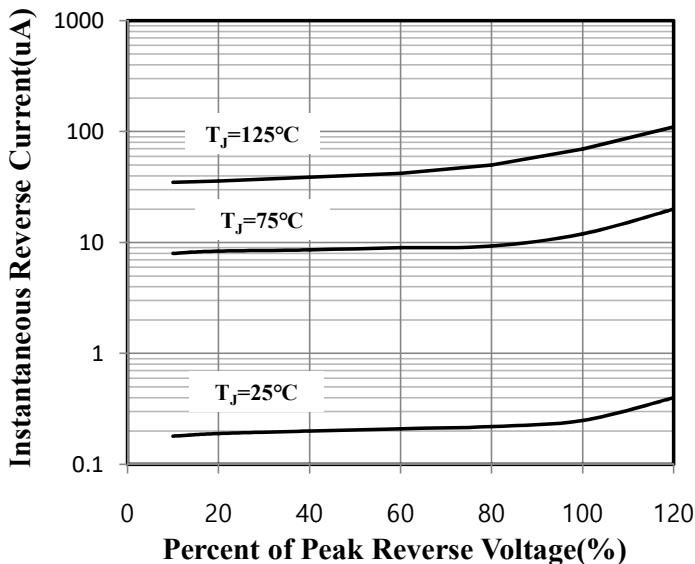

**Fig.2 Maximum Non-Repetitive Peak Forward Surge Current**

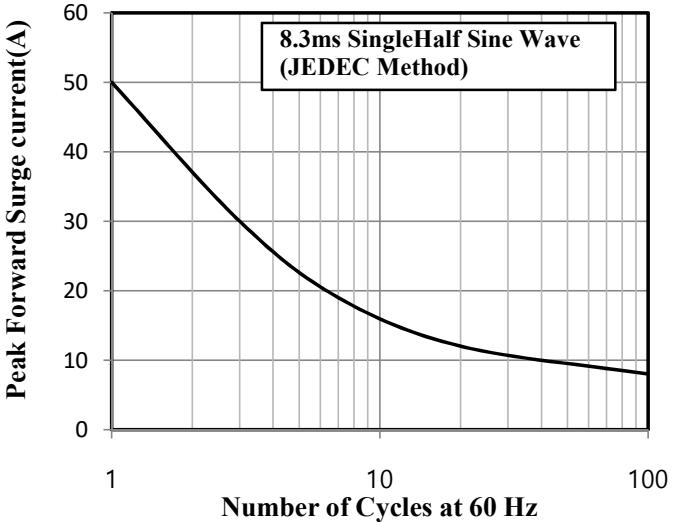

**Fig.4 Typical Junction Capacitance**

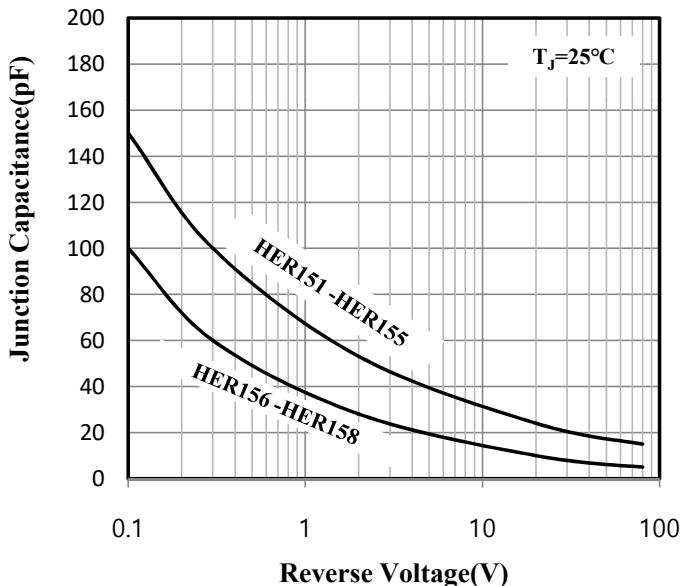

**Fig. 6 Reverse Recovery Time Charateristic and Test Circuit Diagram**

