

## High Efficient Rectifiers

### Reverse Voltage 50 to 1000 Volts Forward Current 1.0 Ampere



#### Features

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability

#### Mechanical Data

- Case : Molded plastic
- Epoxy : UL 94V-0 rate flame retardant
- Lead : Axial leads, solderable per MIL-STD-202, Method 208 guaranteed
- Polarity : Color band denotes cathode end
- High temperature soldering guaranteed : 260°C/10 seconds/0.375", (9.5mm) lead lengths at 5 lbs., (2.3kg) tension
- Weight : 0.34 gram

#### Marking

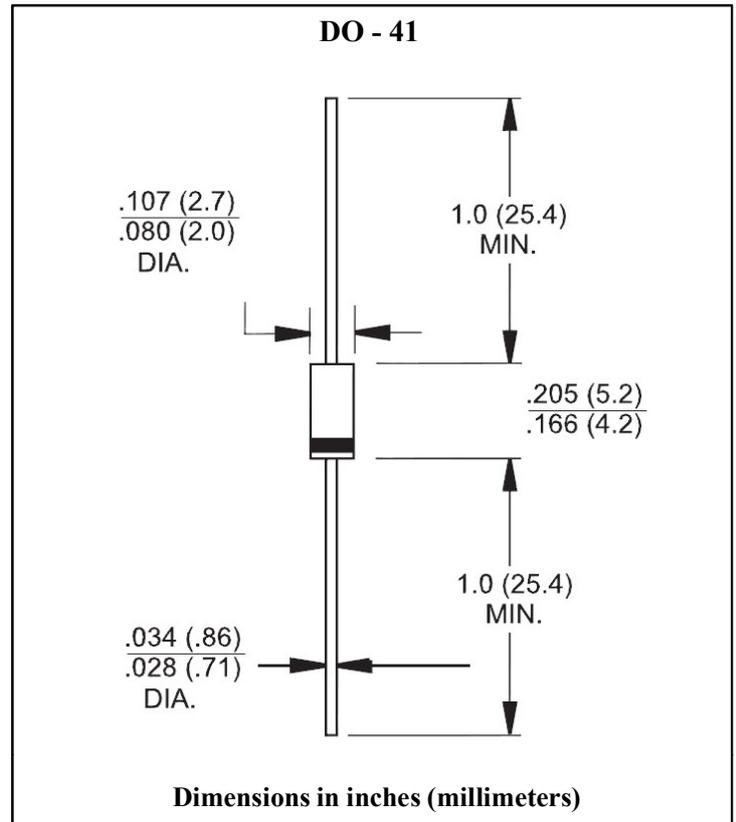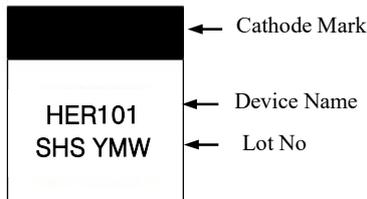

#### Maximum Ratings & Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified  
 Single phase half wave 60 Hz, resistive or inductive load  
 For capacitive load, derate current by 20%


Parameter	Symbol	HER 101	HER 102	HER 103	HER 104	HER 105	HER 106	HER 107	HER 108	Unit	Remark
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	50	100	200	300	400	600	800	1000	V	
Maximum RMS Voltage	$V_{RMS}$	35	70	140	210	280	420	560	700	V	
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	300	400	600	800	1000	V	
Maximum Average Forward Rectified Current 0.375"(9.5mm) Lead Length	$I_{(AV)}$	1.0								A	
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	$I_{FSM}$	30								A	
Maximum Instantaneous Forward Voltage	$V_F$	1.0			1.3		1.7			V	$I_F=1A$
Maximum DC Reverse Current at Rated DC Blocking Voltage	$I_R$	5.0								uA	Ta=25°C
		100									Ta=100°C
Maximum Reverse Recovery Time	$t_{rr}$	50			75					ns	Note 1
Typical Junction Capacitance	$C_J$	20								pF	Note 2
Operation Junction Temperature Range	$T_J$	-55 to +125								°C	
Storage Temperature Range	$T_{STG}$	-55 to +150								°C	

Note 1. Reverse Recovery Time Test Conditions :  $I_F=0.5A$ ,  $I_R=1.0A$ ,  $I_{RR}=0.25A$


Note 2. Measured at 1MHz and Applied Reverse Voltage of 4.0Volts D.C.

**Ratings and Characteristics Curves (Ta=25°C unless otherwise noted)**


**Fig.1 Forward Current Derating Curve**

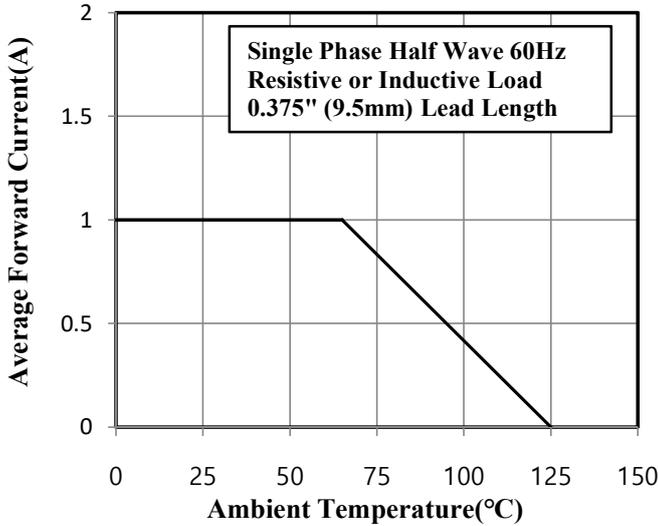


**Fig.2 Maximum Non-Repetitive Peak Forward Surge Current**

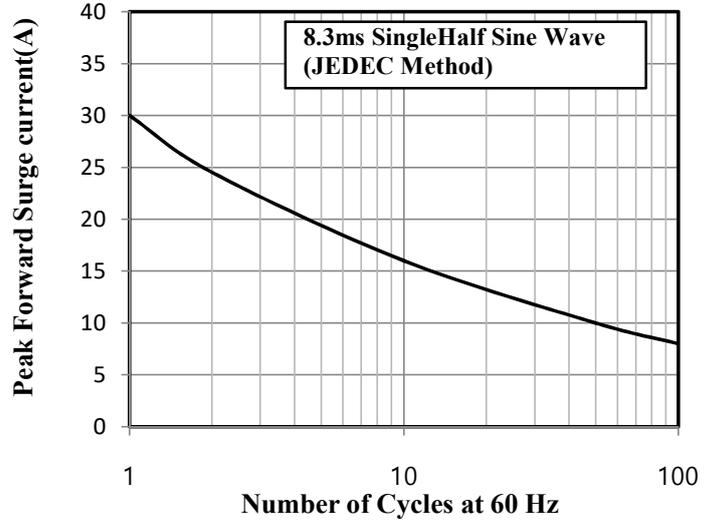


**Fig.3 Typical Instantaneous Forward Characteristics**

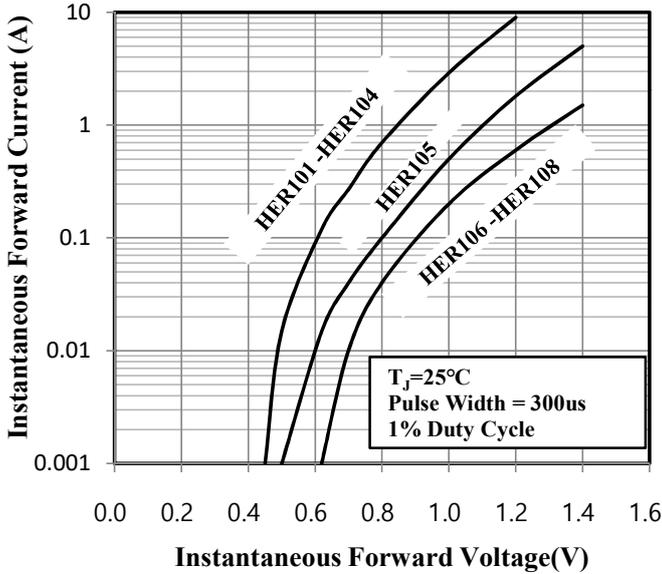

**Fig.4 Typical Junction Capacitance**

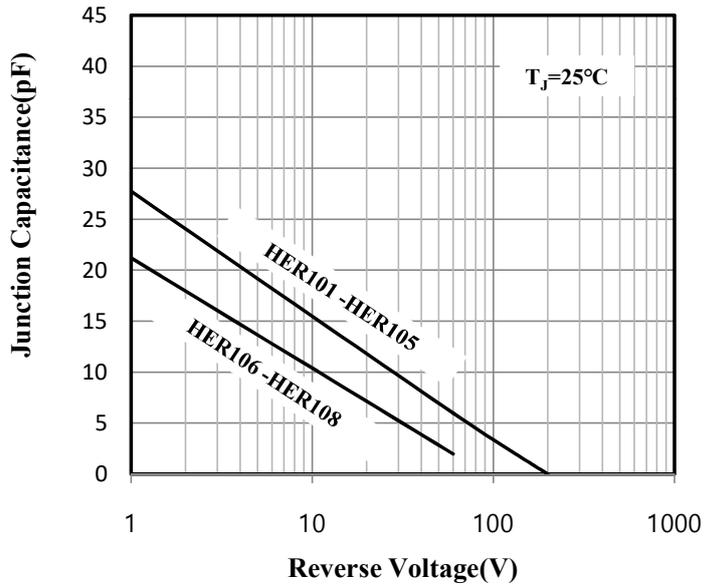

**Fig.5 Typical Reverse Characteristics**

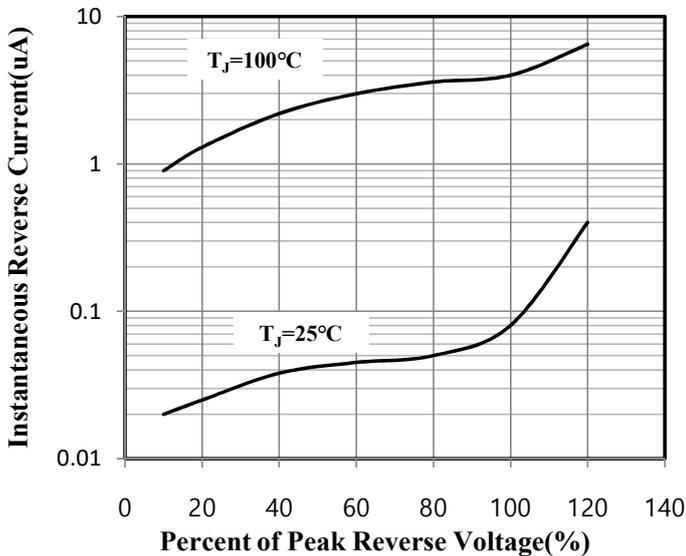

**Fig. 6 Reverse Recovery Time Characteristic and Test Circuit Diagram**

