



**Glass Passivated Super Fast Rectifiers  
Reverse Voltage 50 to 1000 Volts Forward Current 10.0 Amperes**



**Features**

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability

**Mechanical Data**

- Case : ITO-220AC Molded plastic
- Epoxy : UL 94V-O rate flame retardant
- Lead : Leads solderable per MIL-STD-202, method 208 guaranteed
- Polarity : As marked
- High temperature soldering guaranteed : 260°C/10 seconds /0.25",(6.35mm) from case
- Weight : 2.24 grams
- Mounting torque : 5 in-lbs. max.

**Marking**

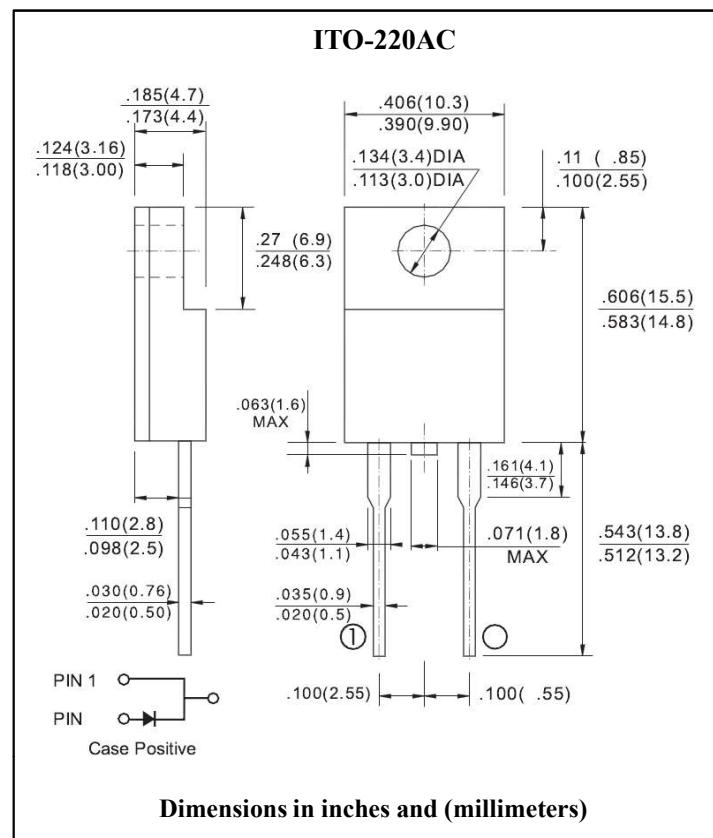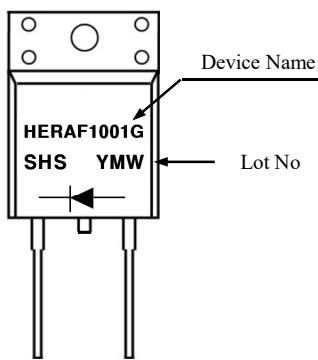

**Maximum Ratings & Electrical Characteristics**

Ratings at 25°C ambient temperature unless otherwise specified

Single phase half wave 60 Hz, resistive or inductive load

For capacitive load, derate current by 20%

Parameter	Symbol	HERAF 1001G	HERAF 1002G	HERAF 1003G	HERAF 1004G	HERAF 1005G	HERAF 1006G	HERAF 1007G	HERAF 1008G	Unit	Remark
Maximum Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	300	400	600	800	1000	V	
Maximum RMS Voltage	V <sub>RMS</sub>	35	70	140	210	280	420	560	700	V	
Maximum DC Blocking Voltage	V <sub>DC</sub>	50	100	200	300	400	600	800	1000	V	
Maximum Average Forward Rectified Current 0.375"	I <sub>F(AV)</sub>						10			A	
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC Method)	I <sub>FSM</sub>						150			A	
Maximum Instantaneous Forward Voltage @ 10A	V <sub>F</sub>		1.0		1.3		1.7			V	
Maximum DC Reverse Current at Rated DC Blocking Voltage	I <sub>R</sub>				10					uA	Ta=25°C
					400					uA	Ta=125°C
Maximum Reverse Recovery Time	t <sub>rr</sub>		50			80				ns	Note 1
Typical Junction Capacitance	C <sub>J</sub>		80			60				pF	Note 2
Typical Thermal Resistance	R <sub>th(j-c)</sub>				2.0					°C /W	Note 3
Operation Junction Temperature Range	T <sub>J</sub>				-55 to +150					°C	
Storage Temperature Range	T <sub>STG</sub>				-55 to +150					°C	

Note 1. Reverse Recovery Test Conditions : I<sub>F</sub>=0.5A, I<sub>R</sub>=1.0A, I<sub>RR</sub>=0.25A


Note 2. Measured at 1MHz and Applied Reverse Voltage of 4.0Volts D.C.

Note 3. Mount on Heatsink Size of 2in × 3in × 0.25 in Al-Plate.




**Ratings and Characteristics Curves (Ta=25°C unless otherwise noted)**


**Fig.1 Forward Current Derating Curve**

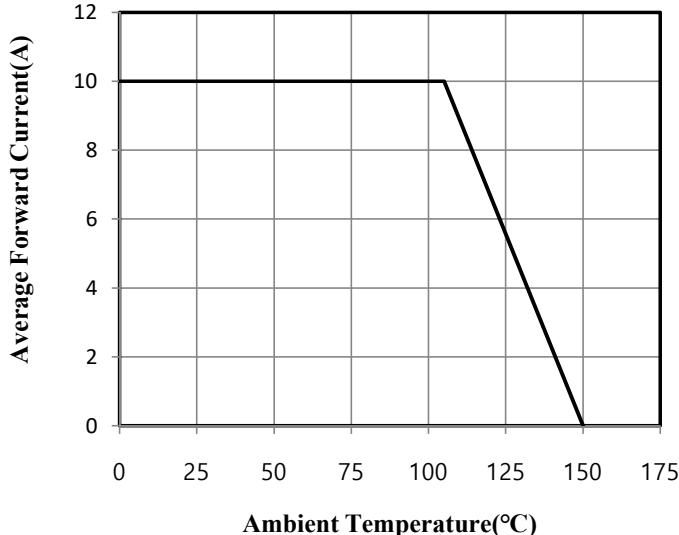


**Fig.3 Typical Instantaneous Forward Characteristics**

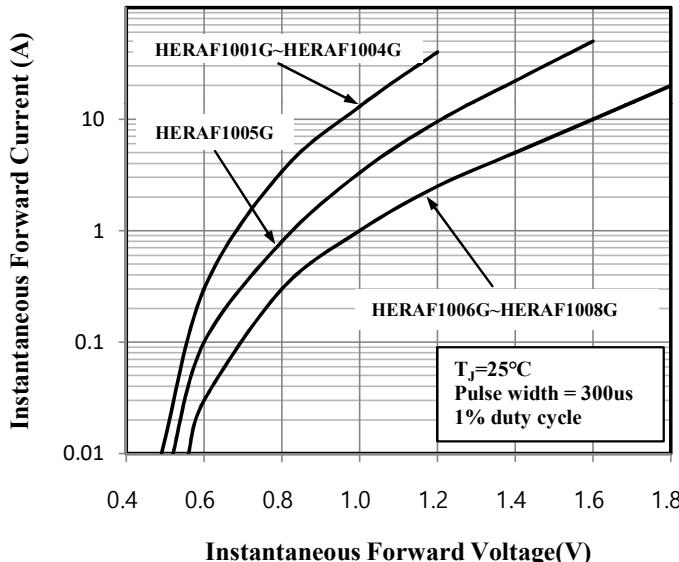


**Fig.5 Typical Reverse Characteristics**

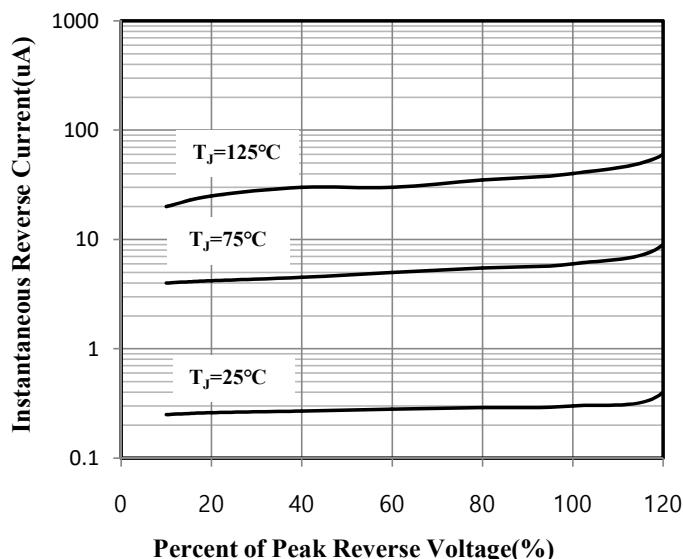

**Fig.2 Maximum Non-Repetitive Peak Forward Surge Current**

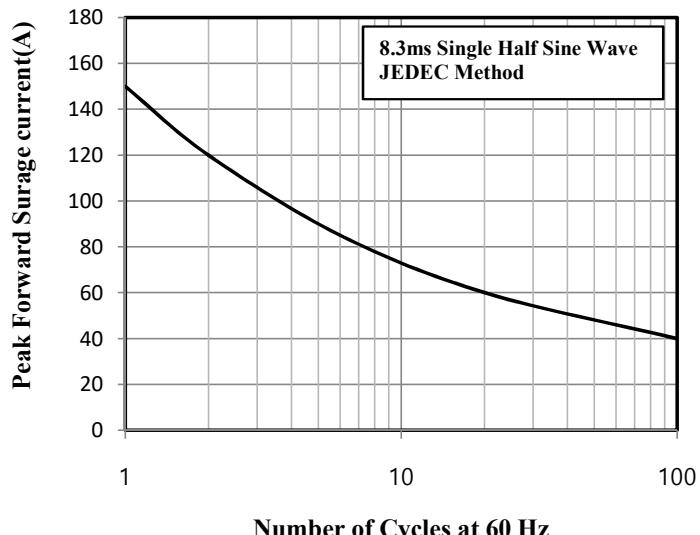

**Fig.4 Typical Junction Capacitance**

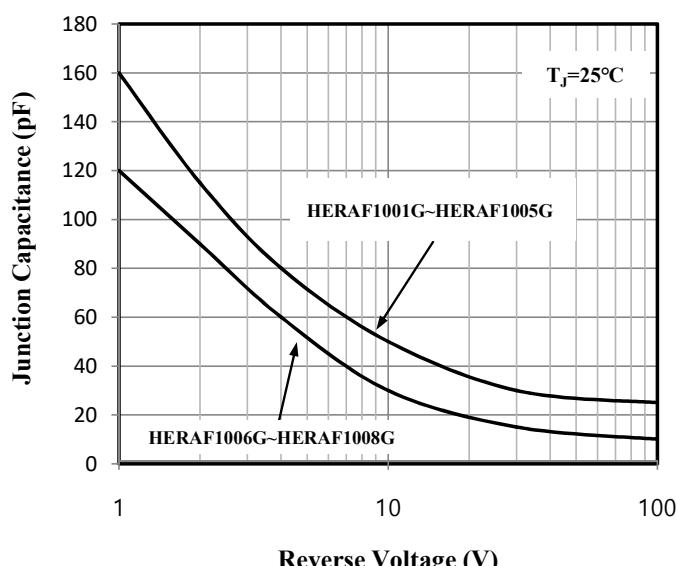

**Fig.6 Reverse Recovery Time Characteristic and Test Circuit Diagram**

