

Glass Passivated Bridge Rectifiers
Reverse Voltage 50 to 1000 Volts Forward Current 1.0 Ampere


Features

- Glass passivated junction
- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique
- High surge current capability
- High temperature soldering guaranteed : 260°C / 10 seconds at 5 lbs., (2.3 kg) tension
- Leads solderable per MIL-STD-202 Method 208



Mechanical Data

- Case : Molded plastic
- Epoxy : UL 94V-0 rate flame retardant
- Terminal : Matte tin plated leads, solderable per JESD22-B102, Meet JESD 201 class 1A whisker test
- Polarity Polarity as marked on the body
- Weight : 0.36 gram (approximately)

Marking

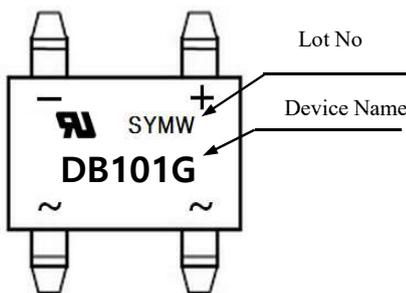

Equivalent Circuit

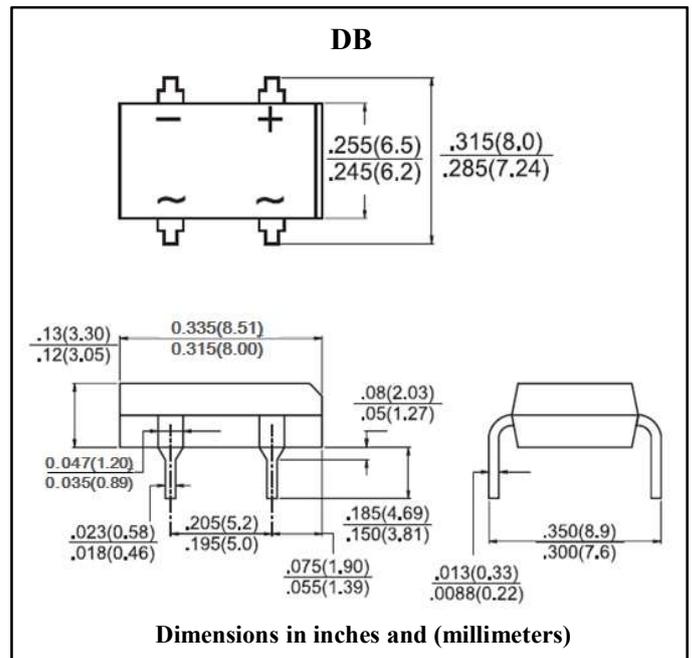

Maximum Ratings & Electrical Characteristics (Ta =25°C Unless otherwise specified)

Parameter	Symbol	DB 101G	DB 102G	DB 103G	DB 104G	DB 105G	DB 106G	DB 107G	Unit	Remark
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V	
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V	
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V	
Average Forward Rectified Current	I_O	1.0							A	
Peak Forward Surge Current, Single Half Sine-wave Superimposed on Rated Load	I_{FSM}	30							A	
Maximum Instantaneous Forward Voltage at 1.0A	V_F	1.1							V	
Maximum DC Reverse Current at rated DC Blocking Voltage per leg	I_R	10							uA	Ta=25°C
		500							uA	Ta=125°C
Typical Thermal Resistance	$R_{th(j-a)}$	40							°C/W	Note 1
	$R_{th(j-l)}$	15								
Operation Junction Temperature Range	T_J	-55 to +150							°C	
Storage Temperature Range	T_{STG}	-55 to +150							°C	

Note 1. Thermal Resistance from Junction to Ambient and from Junction to Lead Mounted on P.C.B. with 0.2" x 0.2"(5mm x 5mm) Copper pads.



Ratings and Characteristics Curves (Ta=25°C unless otherwise noted)

Fig.1 Forward Current Derating Curve

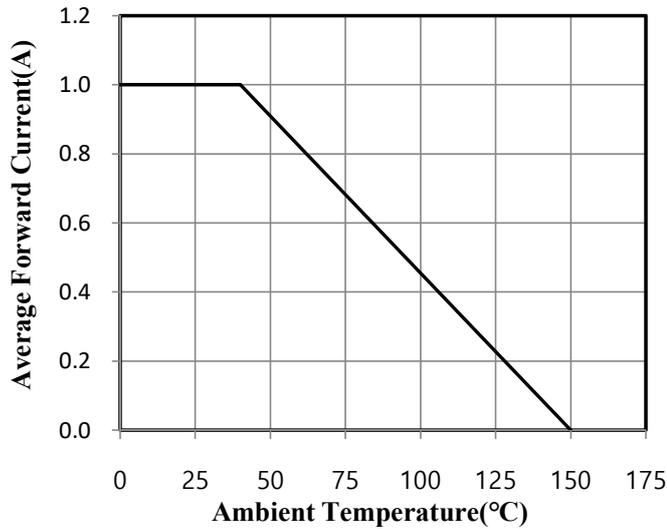


Fig.2 Maximum Non-Repetitive Peak Forward Surge Current

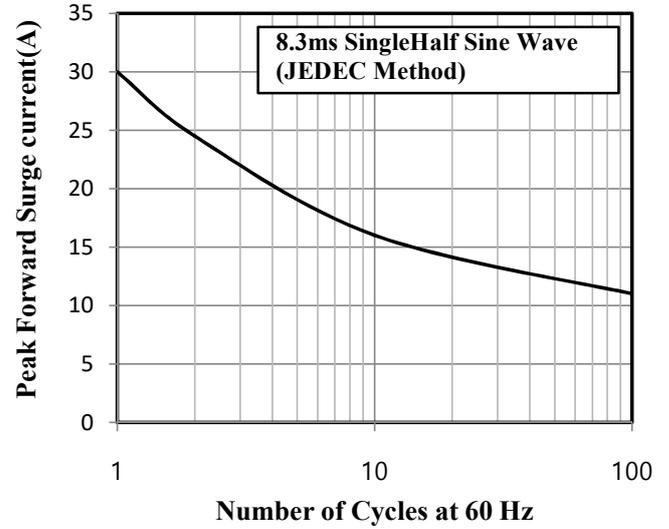


Fig.3 Typical Instantaneous Forward Characteristics

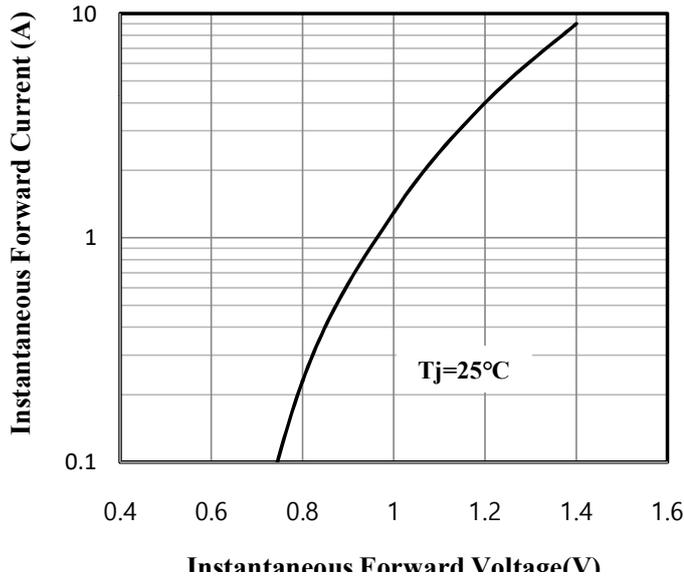


Fig.4 Typical Junction Capacitance

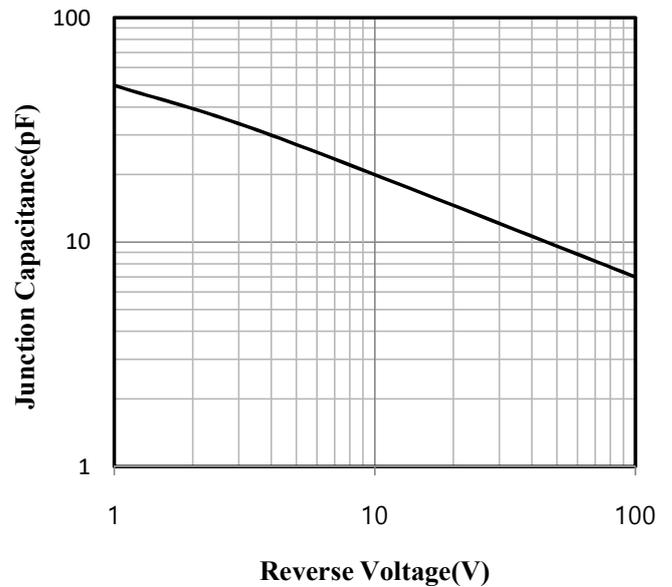


Fig.5 Typical Reverse Characteristics

