



## Glass Passivated Super Fast Rectifiers

Reverse Voltage 50 to 600 Volts Forward Current 5.0 Amperes



### Features

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability

### Mechanical Data

- Case : Molded plastic
- Epoxy : UL 94V-O rate flame retardant
- Lead : Axial leads, solderable per MIL-STD-202, method 208 guaranteed
- Polarity : Color band denotes cathode end
- High temperature soldering guaranteed : 260°C/10 seconds /0.375",(9.5mm) lead lengths at 5lbs.,(2.3kg) tension
- Weight : 1.1grams

### Marking

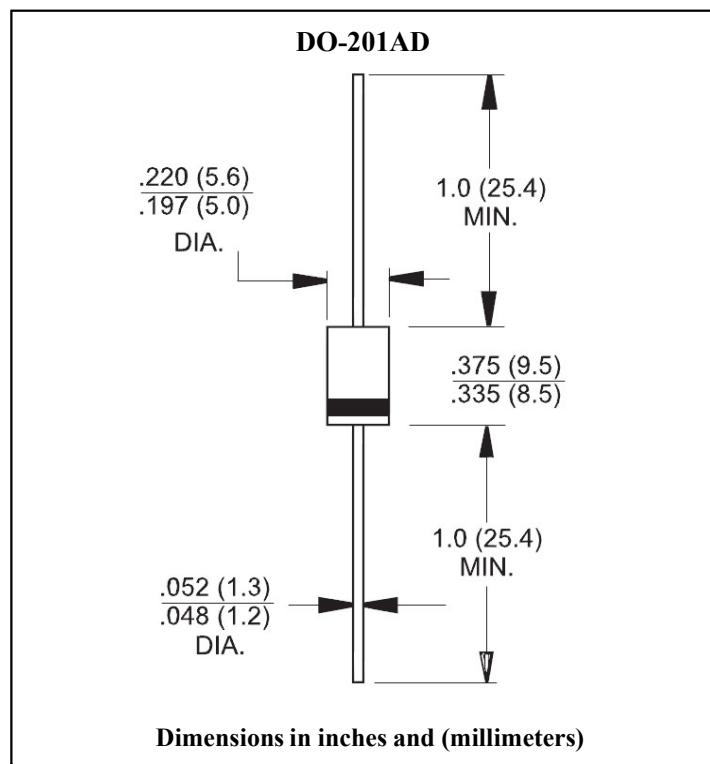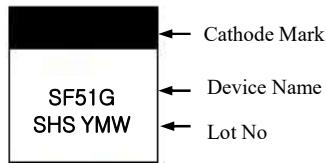

### Maximum Ratings & Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified

Single phase half wave 60 HZ, resistive or inductive load

For capacitive load, derate current by 20%

Parameter	Symbol	SF 51G	SF 52G	SF 53G	SF 54G	SF 55G	SF 56G	SF 57G	SF 58G	Unit	Remark				
Maximum Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	50	100	150	200	300	400	500	600	V					
Maximum RMS Voltage	V <sub>RMS</sub>	35	70	105	140	210	280	350	420	V					
Maximum DC Blocking Voltage	V <sub>DC</sub>	50	100	150	200	300	400	500	600	V					
Maximum Average Forward Rectified Current 0.375" (9.5mm)Lead Length	I <sub>F(AV)</sub>	5.0								A					
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC Method)	I <sub>FSM</sub>	150								A					
Maximum Instantaneous Forward Voltage @ 5.0A	V <sub>F</sub>	0.95			1.3		2.0		V						
Maximum DC Reverse Current at Rated DC Blocking Voltage	I <sub>R</sub>	5.0								uA	Ta=25°C				
		50								uA	Ta=125°C				
Maximum Reverse Recovery Time	trr	35								ns	Note 1				
Typical Junction Capacitance	C <sub>J</sub>	80			60		60		pF	Note 2					
Typical Thermal Resistance	R <sub>th(j-a)</sub>	30								°C /W	Note 3				
	R <sub>th(j-l)</sub>	10								°C /W					
Operation Junction Temperature Range	T <sub>J</sub>	-55 to +150								°C					
Storage Temperature Range	T <sub>STG</sub>	-55 to +150								°C					






Note 1. Reverse Recovery Test Conditions : I<sub>F</sub>=0.5A, I<sub>R</sub>=1.0A, I<sub>RR</sub>=0.25A

Note 2. Measured at 1MHz and Applied Reverse Voltage of 4.0Volts D.C.

Note 3. Mount on Cu-Pad Size 16mm×16mm on P.C.B.



**Ratings and Characteristics Curves (Ta=25°C unless otherwise noted)**

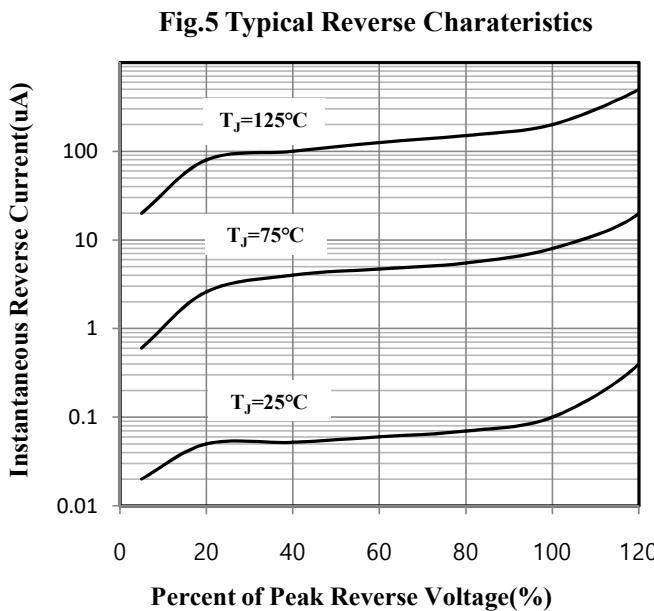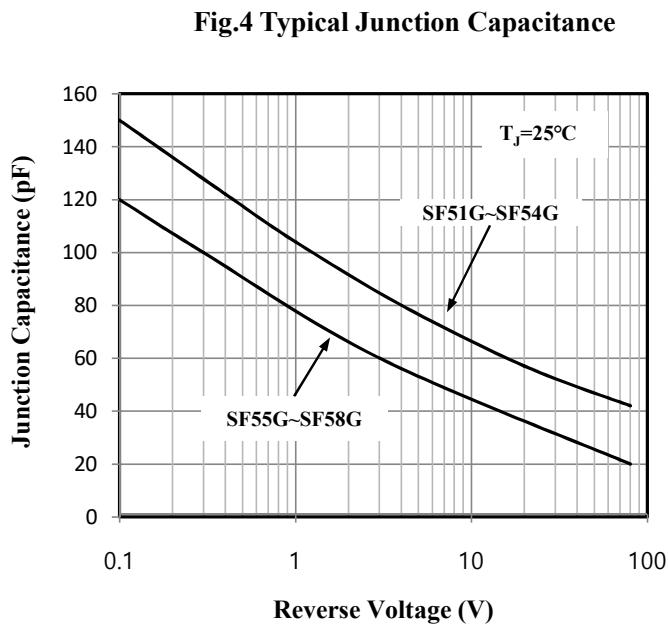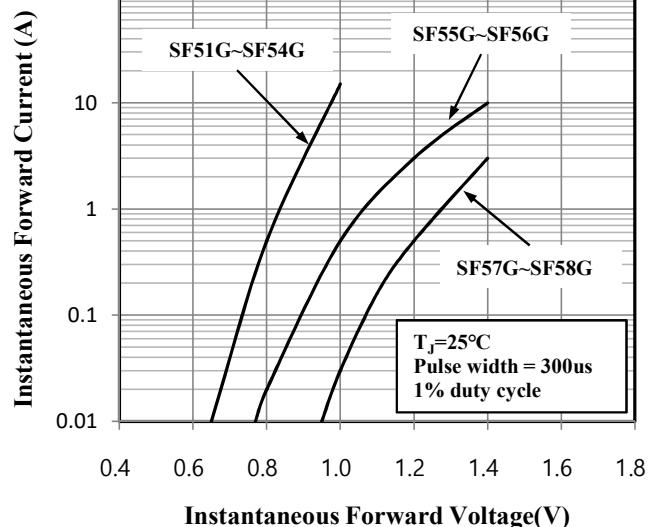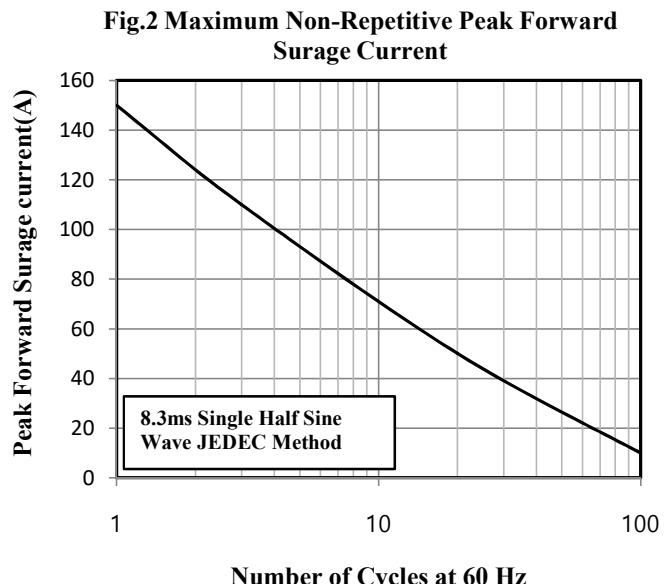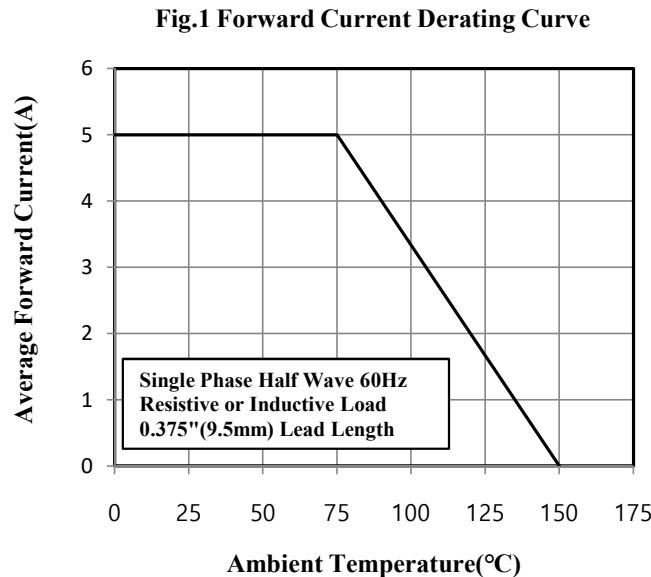

**Fig. 6 Reverse Recovery Time Charateristic and Test Circuit Diagram**

